



Radiator grille emblem, illuminated
Article-number 205-290-99



BRABUS®



The product described in the instructions was developed, produced and checked considering the necessary safety requirements. In order to ensure a proper and safe function and to rule out danger for persons and objects, this product must be installed appropriately. Only trained, qualified staff, having the necessary technical experience and tools, should perform the installation. Therefore you have to read and completely understand these instructions. Check the content of the supplied parts as detailed next page prior to assembly.



205-290-99

Included in delivery:


1. 1x 000-550-06 - BRABUS-emblem, illuminated
2. 1x 222-255-11 - BRABUS Power Control Unit
3. 1x 000-290-95 - Wiring loom for control unit
4. 1x 205-290-11 – Emblem carrier

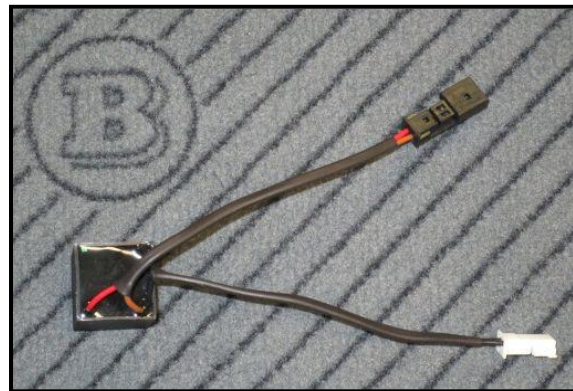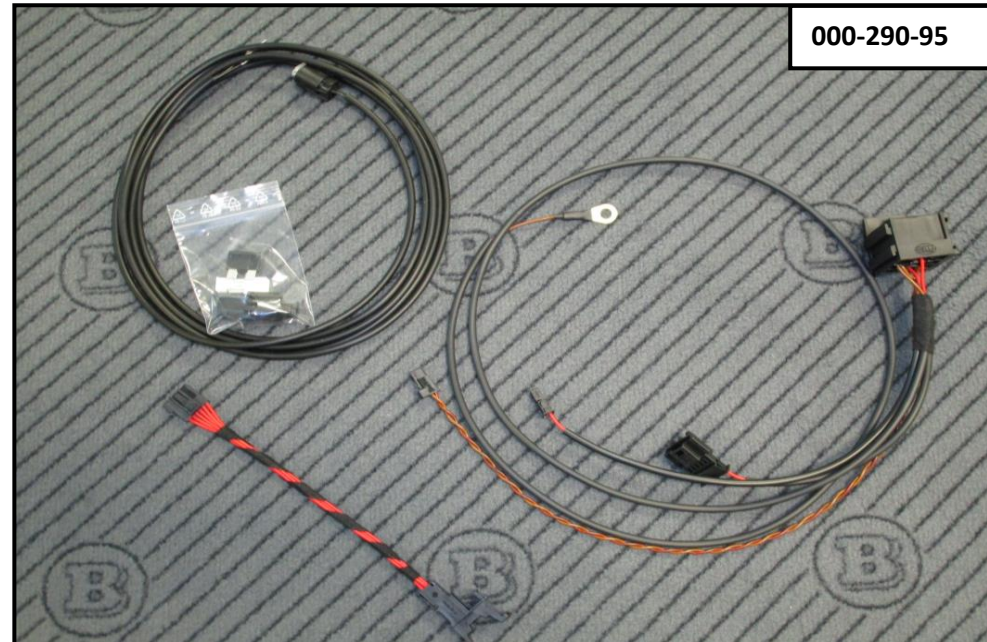



205-290-99

Electrical connections:

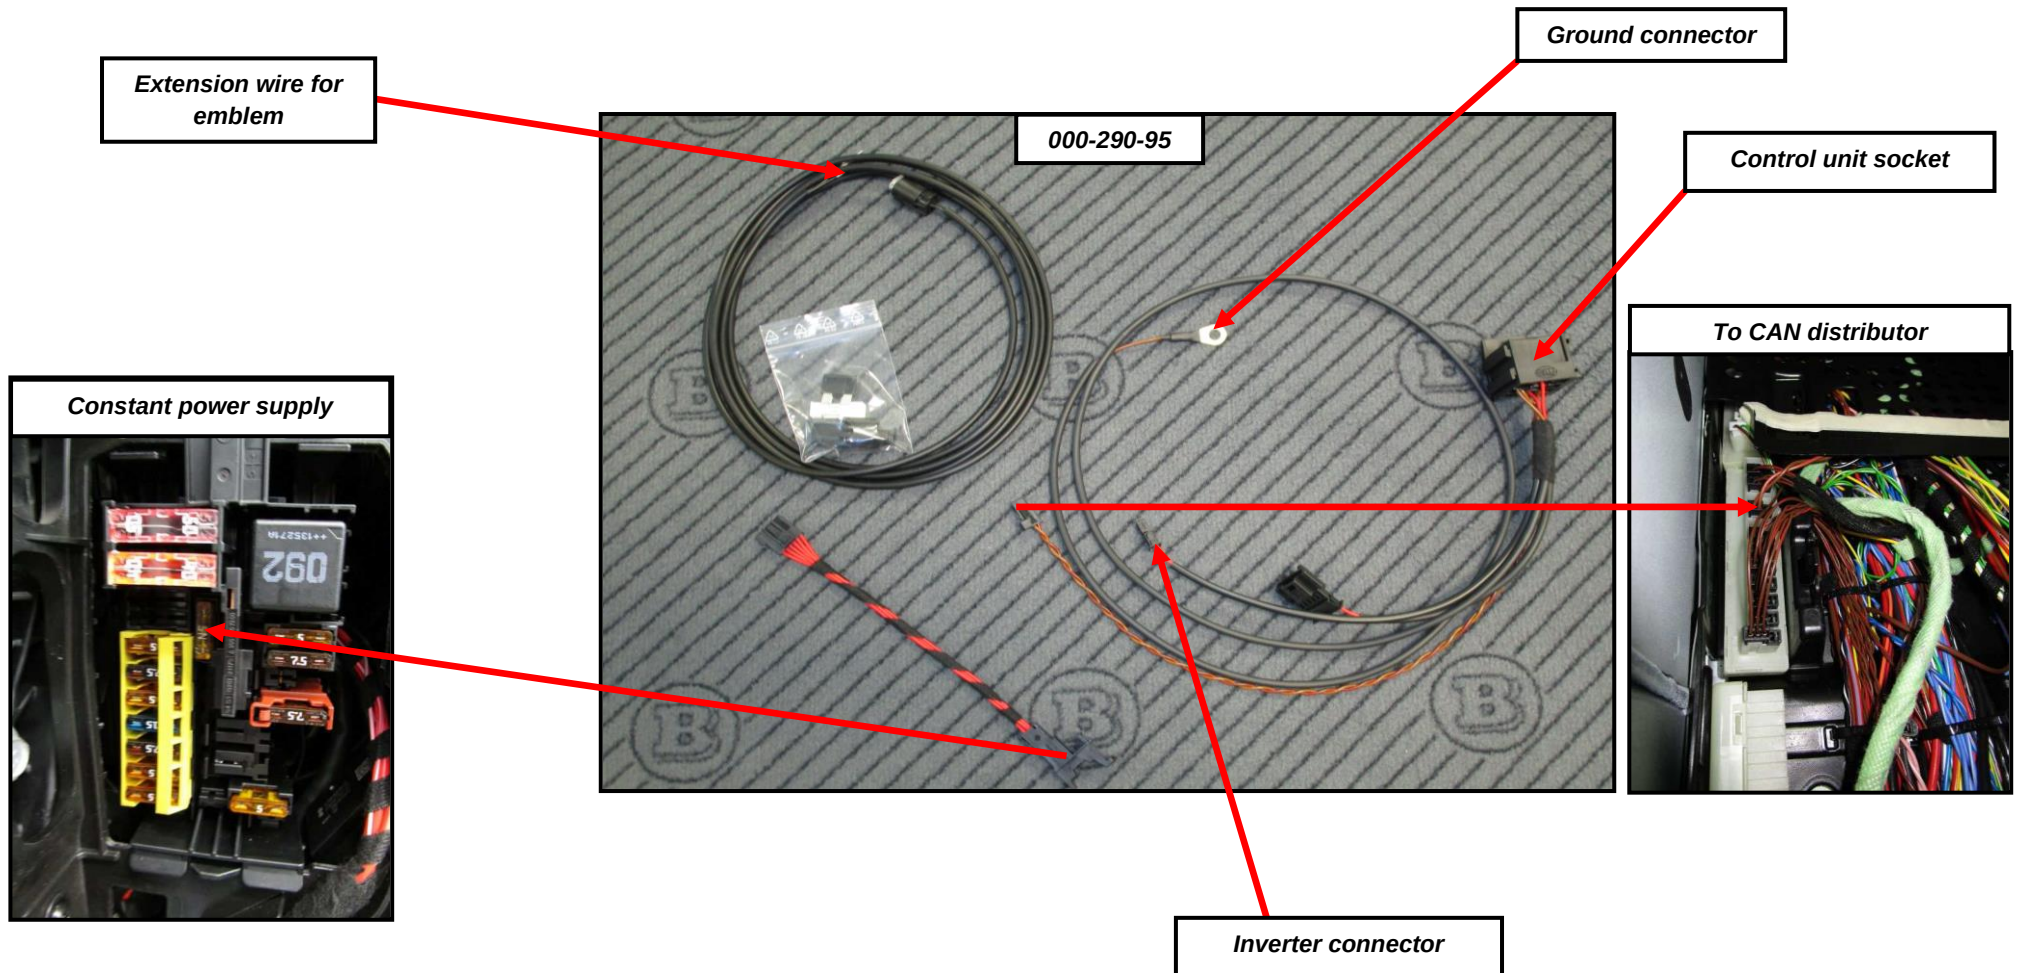



Preparation:

1. Disconnect the ground connector of the vehicle main battery prior to installation. Dismantle standard components according to Mercedes-Benz workshop instructions.
2. Dismantle the left dashboard cover shown below.
3. Dismantle the left lower dashboard cover.
4. Release the fuse & relay box.
5. Disassemble the radiator grille trim according to Mercedes-Benz workshop instructions.



**Montage:**

1. Attach the fuse port shown to the free slot of the fuse and relay box according to image below.
2. Attach the CAN plug of the Brabus wiring loom to the CAN distributor on the driver's side (wire colours brown, brown-red).






3. Bolt the ground ring lug to the ground terminal shown within the driver's footwell.



4. Connect the Brabus main wiring loom (000-290-95) to the inverter wiring loom (black, 2-pole plug set). Connect the black, 2-pole plugs.
5. Connect the extension wire to the white, 2-pole MQS-plug.
 - Attention: The power supply output of the inverters is 110 Volts!!
6. Route the extension wire along the bowden cable of the bonnet latch to the radiator grille.
7. Fixate the wire using cable ties.
8. Fixate the control unit socket using a cable tie.

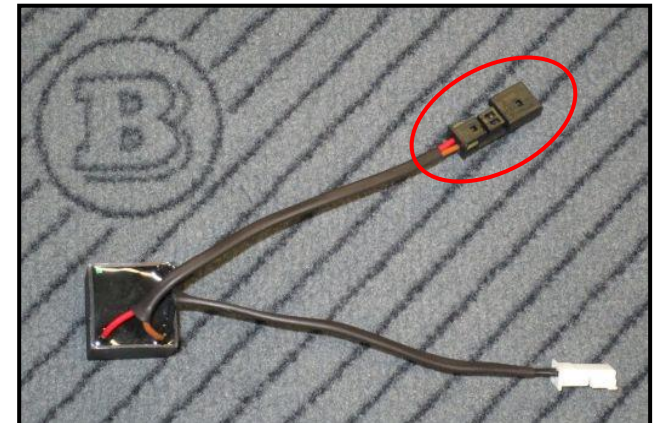



Assembly of emblem carrier:

9. Remove the standard radiator grille emblem.
10. Bolt the emblem carrier to the radiator grille using screws supplied.
11. Bond the illuminated emblem to the emblem carrier.
12. Attach the MQS pins of the wiring loom to the plug supplied.
13. Re-attach the radiator grille and connect the 2-pole plugs.
14. Attach the fuse supplied to the fuse port and re-connect the vehicle main battery.
15. Activate the control unit according to instructions below.
16. Perform a function check.



Activation of control unit:

- **Switch the light switch to first left position**
- **Switch the ignition to position 2**
- **Operate the headlight flasher for 5 seconds**