



Lowering rods W/ V 222
For cars equipped with Airmatic (Code 489) and Magic Body Control (Code 487)
222-008-00




BRABUS®


The product described in the instructions was developed, produced and checked considering the necessary safety requirements. In order to ensure a proper and safe function and to rule out danger for persons and objects, this product must be installed appropriately. Only trained, qualified staff, having the necessary technical experience and tools, should make the installation. Therefore you have to read and completely understand these instructions. Please read these instructions carefully before you start. Check the content of the supplied parts as detailed next page.

Included in delivery:**2x Front axle lowering rod 222-008-00-VA****2x Rear axle lowering rod 222-008-00-HA**

- *Lift the car on a suitable platform at the Mercedes-Benz prescribed lifting positions with due regard to valid safety guidelines.*
- *Remove the front and rear wheels.*
- *Remove the standard sensor rods of the front and rear ride height sensors.*

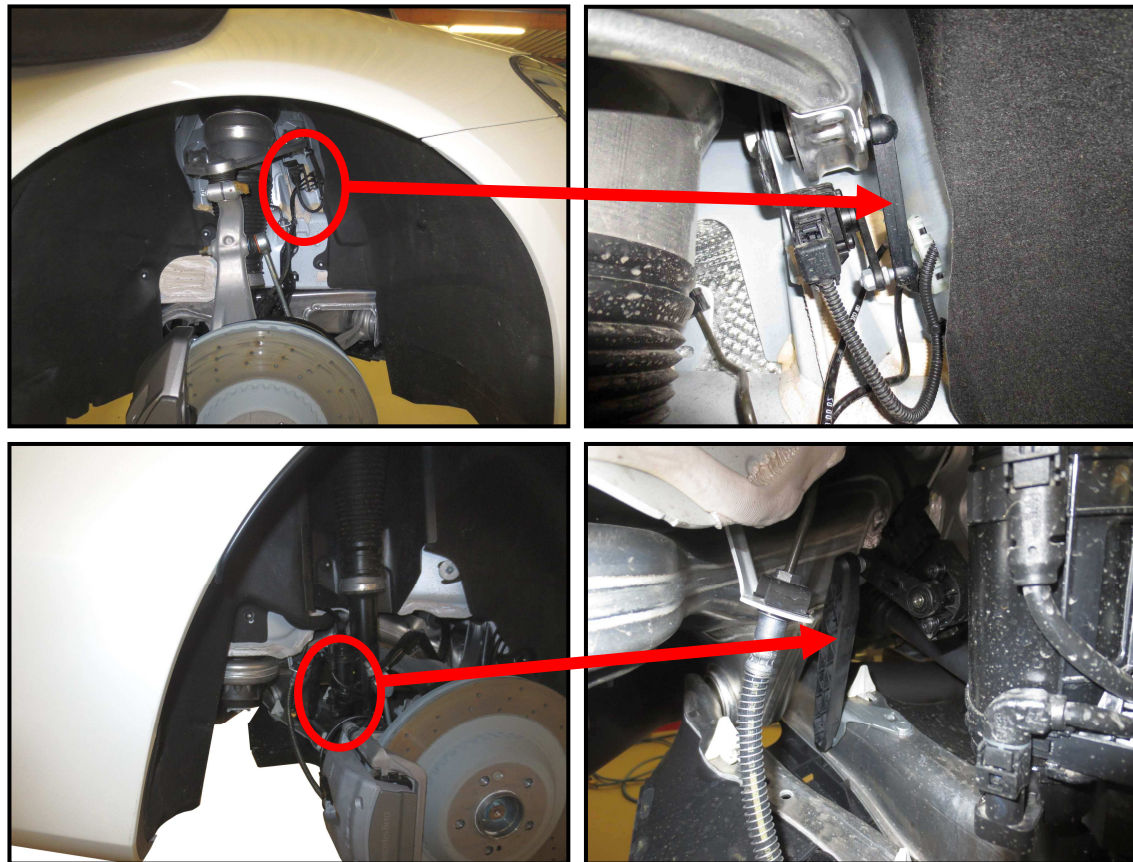

- *Remove the retaining springs of the Brabus lowering rods (turn and pull out).*

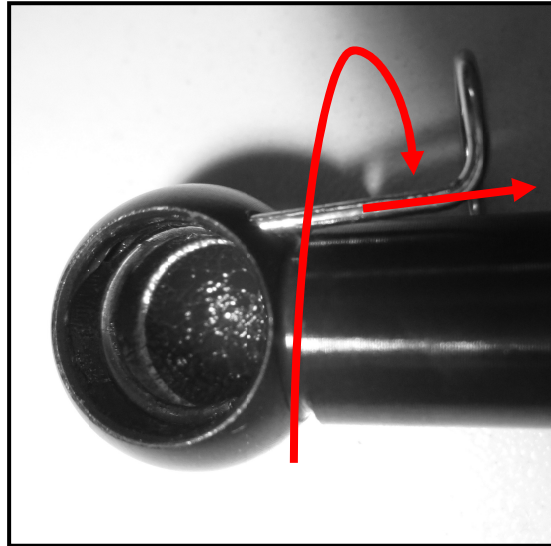

4

- *Attach the Brabus lowering rods to the front and rear ride height sensors and the chassis-related brackets.*
- *Secure the lowering rods by using the retaining springs (push into duct and turn).*
- *Re-attach the front rear wheels according to Mercedes-Benz workshop instructions.*
- *Lower the lifting platform.*
- *There are no suspension adjustments necessary after modification.*